


Electric Deadbolt for automatic gate and garage doors



- **Surface mounting**
- **Housing in stainless steel, on request painted steel**
- **18mm diameter steel bolt – 28mm extension**
- **24Vdc – Peak current 3A; Holding current 300mA**
- **Power supply available on demand**
- **Mechanical override**

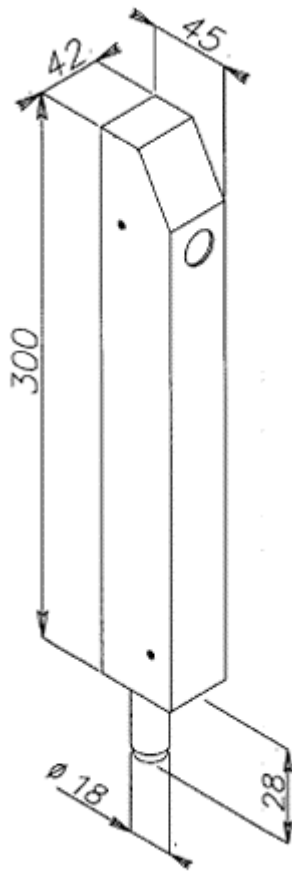

Art. 28700 – Fail secure

Art. 28710 – Fail Safe

Lock body in stainless steel, aluminium, and steel with anti-corrosion treatment

Casing in stainless steel.

Mechanical override - European style cylinder (through-hole both sides) - Supplied without cylinder.

Weather protection of cylinder bore by means of rubber seal

Deadbolt anti-jemmy device with secure positive deadlocking in closed position.

Power Supply: 24 Vdc

Peak current: 3 A; holding current: 300 mA

Application: high security electric deadbolt for automatic gates